

FlashSeal™



**Effective
Damp sealing**



FlashSeal™

Effective damp sealing




BLACK

BRICK RED


GREY

- Sealing, protecting and repairing coverings on roofs
- Well-suited for treating bitumen-based products
- Cover tears up to 5 mm
- Water-tight once hard
- Contains: 750 ml. Enough for 0.5 m²


...how

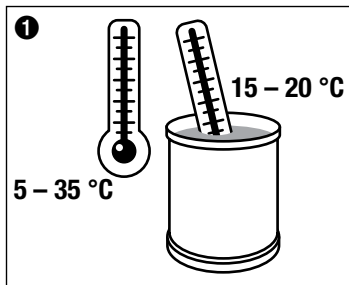


Outdoor temperature between 5-35 °C and FlashSeal™ 15-20 °C.

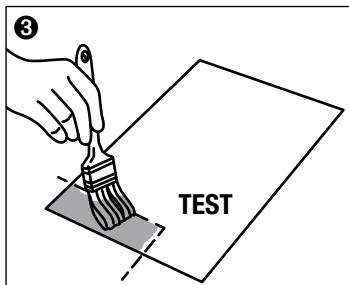


Test adhesion before applying FlashSeal™.

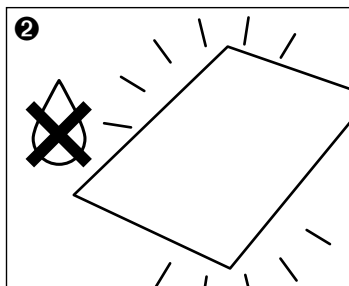


Surfaces must be completely clean and degreased.

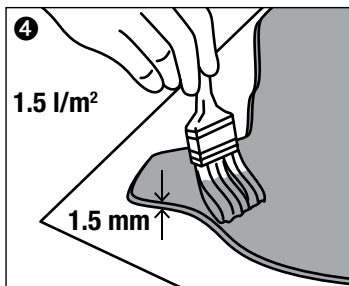


Apply FlashSeal™ in layers minimum 1,5 mm thick.

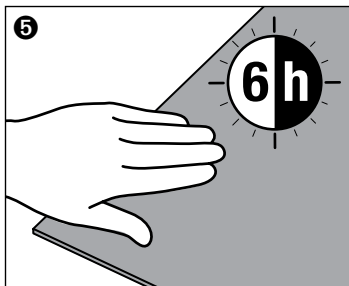


Surfaces dry in approx. six hours depending on the conditions.

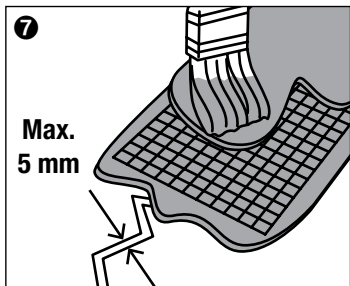


Covers tears up to 5 mm in two layers with a reinforced mesh laid in the first layer.

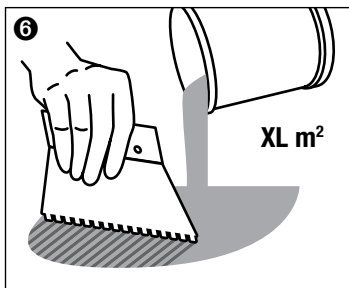


For large areas, you can apply FlashSeal™ with a scraper.

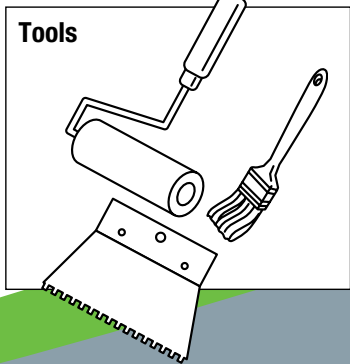


...of coverings on the roof




Sealing for coverings.




Sealing for roof conduits.




Sealing for skylight domes.




Maintenance of roof felt.



Sealing for flashings.



Sealing for balcony floors.



Repairing and sealing plinths.



Sealing of coverings for skylights.

FlashSeal™ ensures excellent adhesion to:

- Various covering materials
- Brickwork, calcareous sandstone, slate
- Concrete, fibre concrete, plasterboard
- Bitumen/tar, roof felt and cut glass
- Wood, particle board
- Glass-fibre reinforced polyester
- EPDM film, PC film, hard PVC
- Aluminium, anodised aluminium
- Powder-coated aluminium
- Galvanised, zinc-plated sheets
- Steel, galvanised steel, stainless steel
- Copper, brass, lead, zinc

Manufacturer:

PERFORM A/S
Ndr. Stationsvej 4
DK-8721 Daugård

www.perform.dk
Tlf. : +45 2075 5510
Fax: +45 7022 6240